

fapim

Via de Carbone 114
55011 Altopascio (LU) Italy






LOIRA+
fapim



Use for NEN5096
ENV1627 ENV1630
class 2





Use for NEN5096
ENV1627 ENV1630
class 3

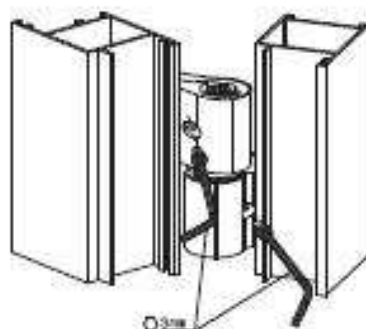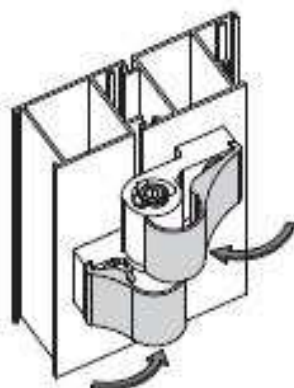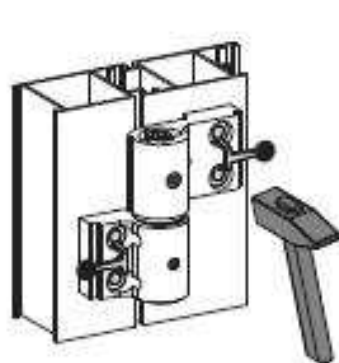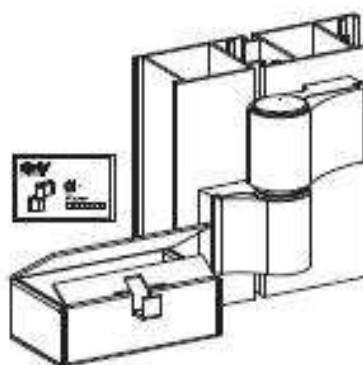

6654



6654A

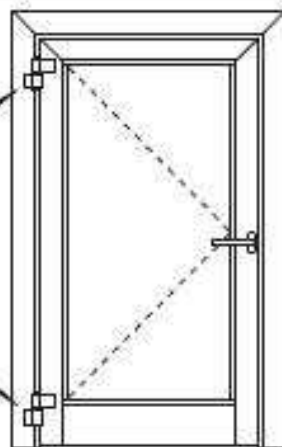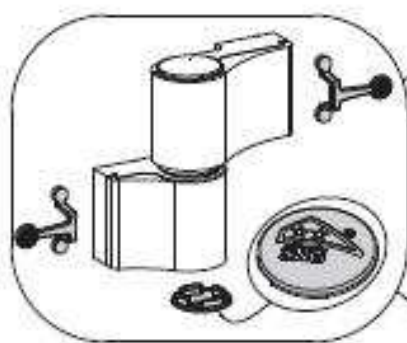

I - Limitare la corsa verticale dell'anta a 2 mm
GB - Limit the vertical stroke of the sash to 2mm
F - Limiter la course verticale de l'ouvrant à 2 mm
D - Den vertikalen Kurs der Flügel bis 2 mm begrenzen
E - Limiter la course vertical de la hoja a 2 mm
NL - De verticale koers van de vleugel begrenzen tot 2 mm
PL - Ograniczyć ruch pionowy w skrzydle na wysokość 2 mm
GR - Περιορίσει την κάθετη διαδρομή του φύλλου στα 2 mm
RUS - Ограничить вертикальное движение створки на 2мм



6654



6654



6654B

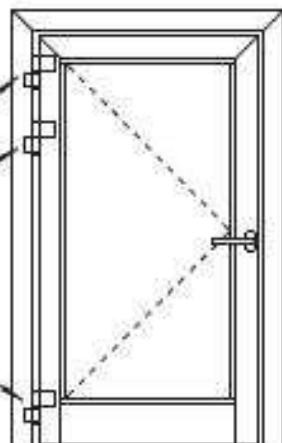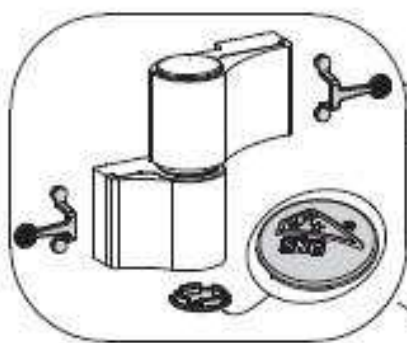

6654

